



Interstate 880 Interchange Improvements (Whipple Road/Industrial Parkway Southwest and Industrial Parkway West)

SPRING 2025

PROJECT OVERVIEW


The Alameda County Transportation Commission (Alameda CTC), in cooperation with the California Department of Transportation (Caltrans), will implement full interchange improvements at the Interstate 880 (I-880)/Whipple Road interchange and Industrial Parkway West interchange, including:

- A northbound off-ramp to Industrial Parkway West
- A southbound high occupancy vehicle (HOV) bypass lane on the southbound loop off-ramp
- Bridge reconstruction over I-880
- Surface street improvements and realignment

Due to their close proximity, improvements at both interchanges are being developed as a single project.

PROJECT NEED


- I-880/Whipple Road ramp intersections currently operate at or over capacity, with a few movements experiencing high delay during a.m. and p.m. peak hours.
- Observed queues for the northbound off-ramp approach at Whipple Road occasionally extend to the mainline.
- The Whipple Road–Industrial Parkway Southwest interchange was identified by the cities of Union City and Hayward as needing bicycle and pedestrian improvements to enhance the connectivity between the east and west sides of I-880.
- There is no designated bicycle facility along Whipple Road or Industrial Parkway at I-880, and the sidewalk along the north side of Whipple Road is narrow.
- The pavement condition of Whipple Road within the Caltrans right-of-way is degraded and is in need of major rehabilitation.

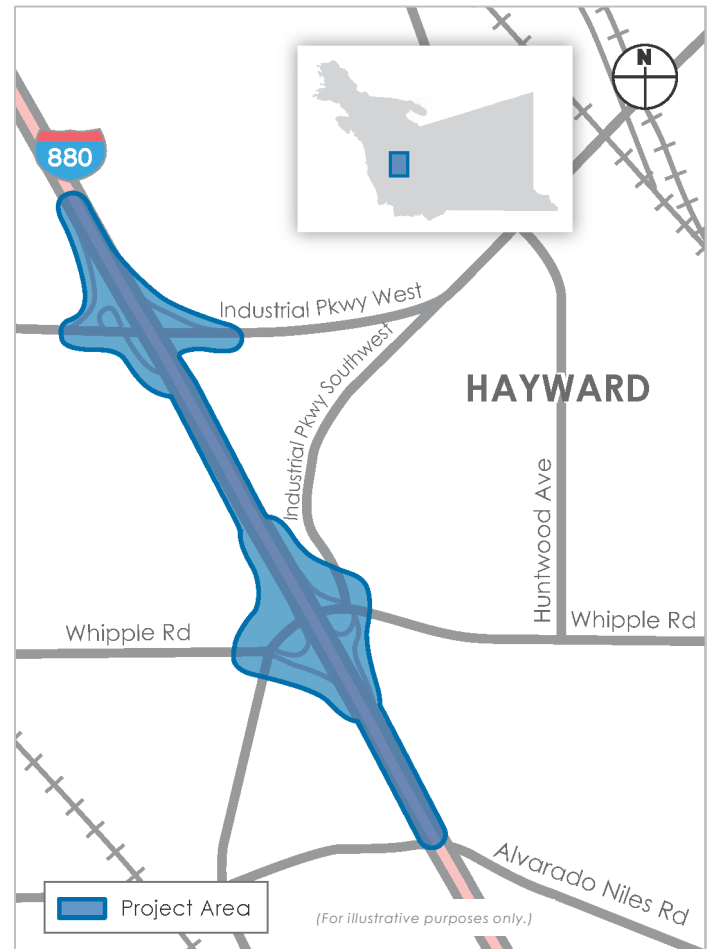

PROJECT BENEFITS

- Improves freeway access and enhances goods movement along the I-880 corridor
- Relieves freeway and interchange congestion
- Enhances safety
- Improves local business access along Whipple Road
- Improves bicycle and pedestrian access across the I-880 freeway
- Improves transit access to and from the I-880 freeway
- Enhances goods movement along the I-880 Corridor, part of the National Primary Freight Network, and to major industrial and warehousing areas

DESIGN ALTERNATIVES

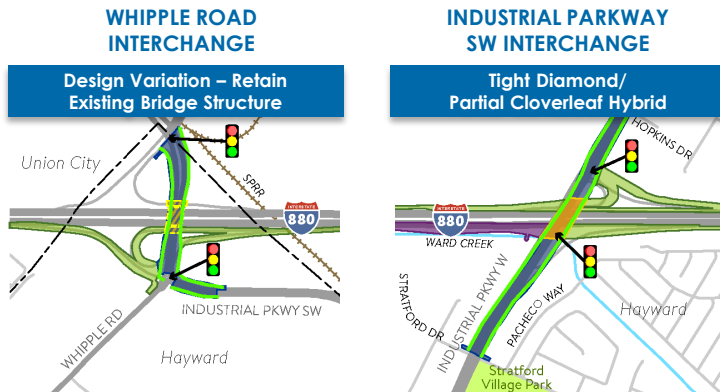

LEGEND

- Roadway Improvements
- New Freeway Ramps
- Modified Freeway Ramps
- Replace Bridge Structure
- Retain Bridge Structure
- Enhanced Bike Facilities
- Modified Traffic Signal

STATUS

Implementing Agency: Alameda CTC

Current Phase: Plans, Specifications and Estimate (PS&E)

- Final Environmental Document was approved on September 20, 2022.
- Final Project Report was approved on October 3, 2022.

PARTNERS AND STAKEHOLDERS

Caltrans, Alameda CTC, and the cities of Hayward and Union City

Note: Information on this fact sheet is subject to periodic updates.

COST ESTIMATE BY PHASE (\$ X 1,000)

| | |
|---------------------------|------------------|
| Planning/Scoping | \$925 |
| PE/Environmental | \$5,025 |
| Final Design (PS&E) | \$15,600 |
| Right-of-Way | \$30,000 |
| Construction | \$168,450 |
| Total Expenditures | \$220,000 |

FUNDING SOURCES (\$ X 1,000)

| | |
|-----------------------|------------------|
| Measure BB | \$104,000 |
| Federal | TBD |
| State | \$50 |
| Local | TBD |
| TBD | \$115,950 |
| Total Revenues | \$220,000 |

Note: Measure BB funding is subject to future Commission approval.

SCHEDULE BY PHASE

| | Begin | End |
|------------------|-------------|-------------|
| Scoping | Fall 2017 | Summer 2018 |
| PE/Environmental | Summer 2018 | Summer 2022 |
| Final Design | Summer 2022 | TBD |
| Right-of-Way | Summer 2022 | TBD |
| Construction | TBD | TBD |

Note: Project construction schedule is contingent on funding availability.